





## LED Converter

The Arial LED Converter is an unrivalled product when it comes to versatility in the LED market.



- All in one solution
- Selectable colour temperature
- Integral switches for multiple wattages and CCT
- Cool White / Warm White / Daylight
- Selectable wattage
- Fully adjustable / Innovative bracket
- Fits cut-outs 65mm to 205mm
- 50000 Hours

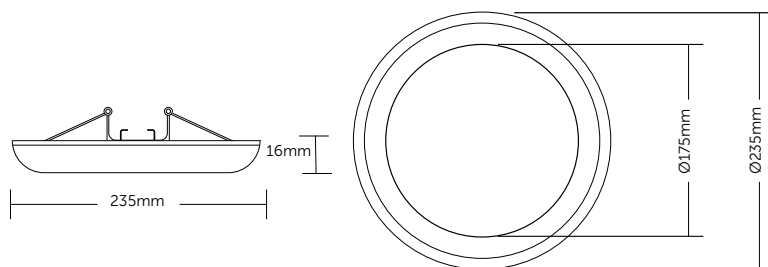

Selectable Colour Temperature



Selectable Wattage



technical@bellighting.co.uk  
sales@bellighting.co.uk



# LED Converter

Technical Specification	
Construction	Polycarbonate
Driver	BELL
LED Chip	Samsung
IP Rating	IP20
Operating Temp	0°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
L1A / L1B / L2A / L2B Compliant	Yes

\* All BELL Lighting luminaires are rated L80 B10, so for a 50,000 hour product. L80B10 at 50,000 hours our fittings will still have 80% of initial lumen, only 10% of fittings may fail to achieve this.

Code	W	Description	Lm	Temp	Hours
06840	10/13/16	Arial LED Converter	950-1800	3000K / 4000K / 6000K	50000
08196	-	Emergency Pack for above	-	-	-

	Colour Temperature			
	3000K	4000K	6000K	
Watts	10W	1100 Lumens	1200 Lumens	1000 Lumens
	13W	1400 Lumens	1500 Lumens	1300 Lumens
	16W	1600 Lumens	1700 Lumens	1400 Lumens

<sup>1</sup> Exceeds EU standard of 70 for Lumens Maintenance Ratio

<sup>2</sup> Exceeds EU standard of RA 80 for Colour Rendering Index

<sup>3</sup> Subject to terms & conditions (Contact Customer Service)

