



LED Under Cabinet Fitting

- Replacement for standard Under Cabinet Fitting
- Chain linkable design
- IP20
- 3 Year Guarantee³
- Complete with:
 - Eurohook packaging for display
 - 1 x Power Lead
 - 1 x Direct Connection Joint
 - 1 x Connection Point Cover
 - 2 x Mounting Brackets
 - 2 x Fixing Screws




Code	Description	Volts	W	Length	lm	Temp	Finish	Hours
07160	4W Under Cabinet Fitting	220-240V	4	313	380	4000K	Frosted	30000
07161	8W Under Cabinet Fitting	220-240V	8	573	750	4000K	Frosted	30000
07162	11W Under Cabinet Fitting	220-240V	11	873	1050	4000K	Frosted	30000
07163	14W Under Cabinet Fitting	220-240V	14	1173	1350	4000K	Frosted	30000
07164	4W Under Cabinet Fitting	220-240V	4	313	380	2700K	Frosted	30000
07165	8W Under Cabinet Fitting	220-240V	8	573	750	2700K	Frosted	30000
07166	11W Under Cabinet Fitting	220-240V	11	873	1050	2700K	Frosted	30000
07167	14W Under Cabinet Fitting	220-240V	14	1173	1350	2700K	Frosted	30000
07168	250mm Link Lead							
07169	500mm Link Lead							
07170	1000mm Link Lead							



Technical Specification

Data	
Construction	Polycarbonate
Driver	BELL
LED Chip	Samsung
IP Rating	IP20
Operating Temp	0°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio

07160-07167 Under Cabinet

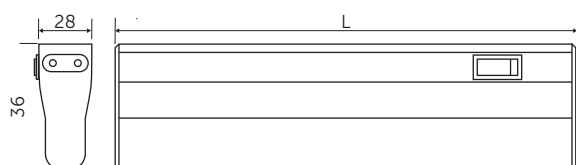

W	Length
4	313mm
8	573mm
11	873mm
14	1173mm



¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)