




LED Integrated Bollard

- Perfect for driveways and amenity lighting to ensure safe passage of visitors and staff
- Clear polycarbonate diffuser
- Root mounting kit included
- Powder coated aluminium construction
- Choice of heights 500/700/1000mm
- Designed to minimise light pollution
- 360° Light distribution
- Cool white
- 30000 Hours
- IP65




Code	V	W	lm	Description	Temp	Hours
10440	100-240	6	366	Luna 6W IP65 LED 500mm Bollard	4000K	30000
10441	100-240	8	605	Luna 8W IP65 LED 700mm Bollard	4000K	30000
10442	100-240	10	685	Luna 10W IP65 LED 1000mm Bollard	4000K	30000

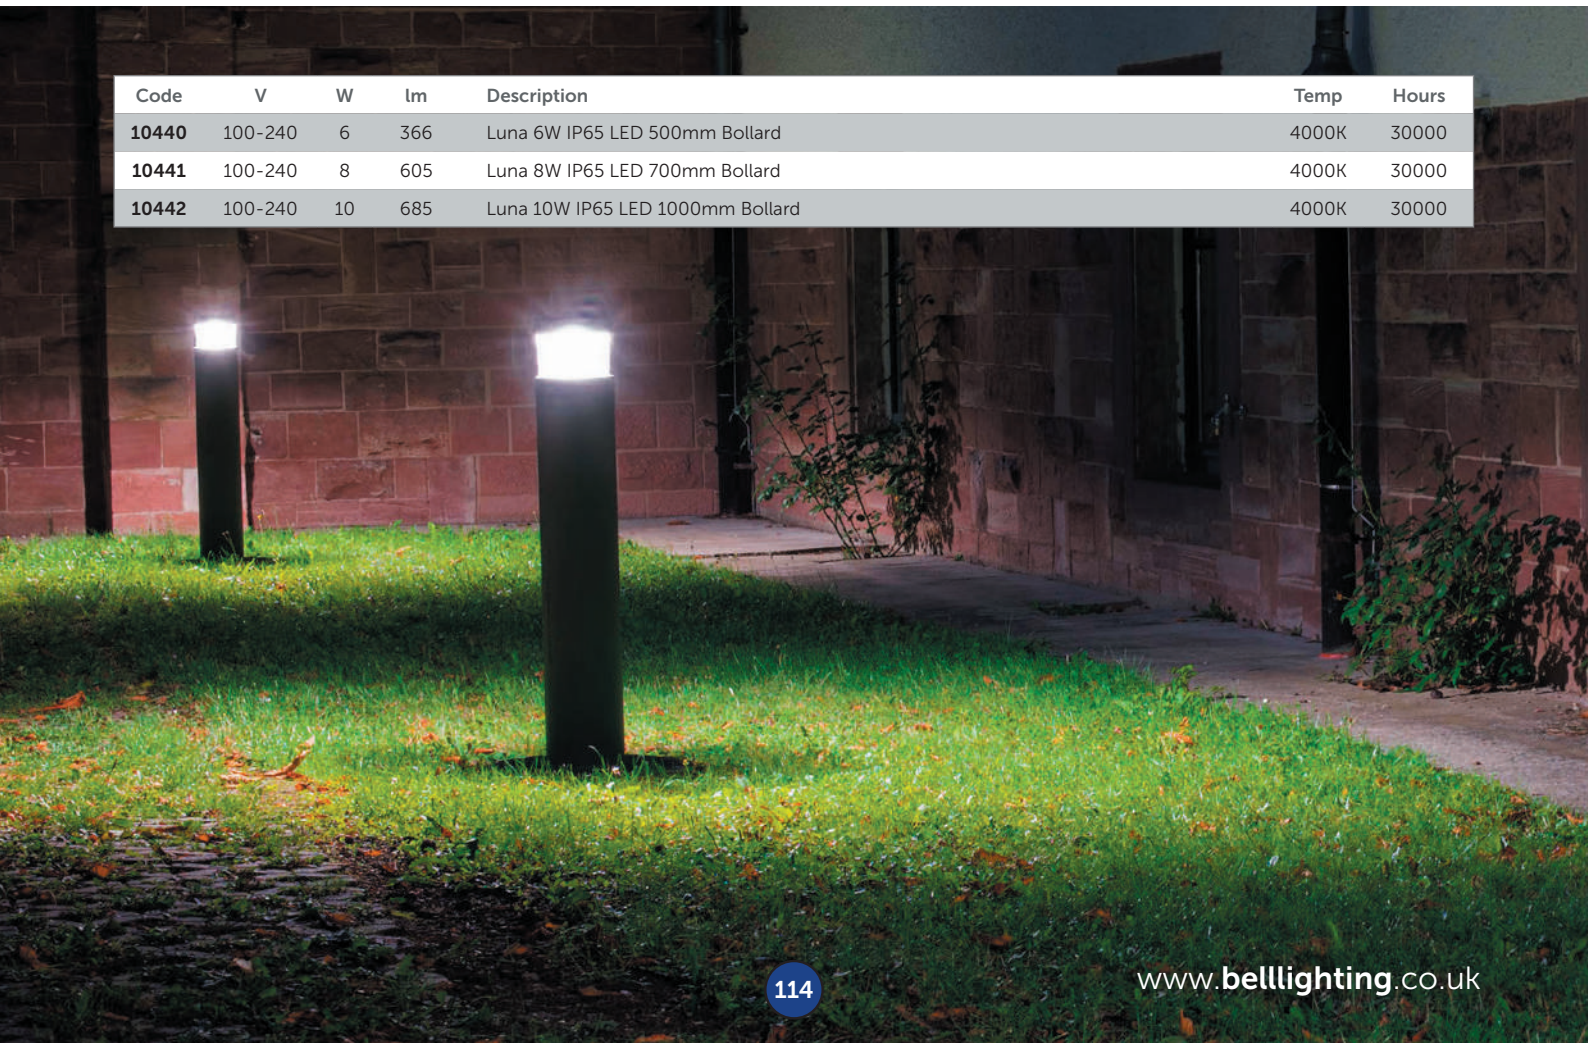



Technical Specification

Data	
Construction	Powder coated aluminium
Driver	BELL
LED Chip	Samsung
IP Rating	IP65
Operating Temp	-30°C to +35°C
Input Voltage	220-240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio

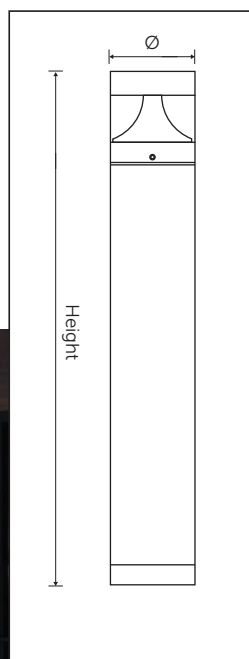

	6W	8W	10W
Height	500mm	700mm	1000mm
∅	120mm	120mm	160mm



¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)