
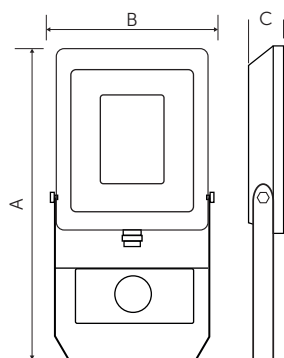


Skylinevista

LED Floodlight

The Skyline Vista LED Floodlight offers a super slim compact design ideal for domestic and commercial premises. Available in a variety of wattages and colour temperatures with the option to include a PIR.

- Genuine replacement for Halogen Floodlight
- Super slim compact design
- SMD LED
- Die-cast Aluminium
- Separately tested IP65 PIR Sensor (PIR versions)
- PIR Over-ride function (PIR versions)
- Average 8M detection range for PIR Floods
- Available in 4000K & 2700K

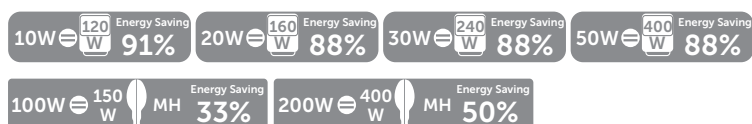

Without PIR

	10W	20W	30W	50W	100W	200W
A	133mm	149mm	177mm	248mm	190mm	257mm
B	100mm	116mm	145mm	209mm	270mm	351mm
C	21.5mm	23mm	23mm	23mm	31mm	35mm

With PIR

	10W	20W	30W	50W
A	215mm	230mm	275mm	347mm
B	117mm	134mm	168mm	223mm
C	46mm	46mm	46mm	46mm



technical@bellighting.co.uk
sales@bellighting.co.uk

Skylinevista

LED Floodlight

Technical Specification	
Construction	Die Cast Aluminium body, Stainless Steel screws and fixings
Driver	BELL
LED Chip	SMD
IP Rating	IP65
Operating Temp	-20°C to +25°C Outdoor use only
Input Voltage	240V
Power Factor	> 0.9
CRI	80 - Exceeds EU standard of Ra 70 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
Windage	10W 0.013M ² / 20W 0.015M ² / 30W 0.024M ² / 50W 0.053M ² / 100W 0.051M ² / 200W 0.087M ² 10W PIR 0.023M ² / 20W PIR 0.033M ² / 30W PIR 0.043M ² / 50W PIR 0.075M ²
Weight	10W 0.32Kg / 10W PIR 0.49Kg / 20W 0.39Kg / 20W PIR 0.57Kg / 30W 0.54Kg / 30W PIR 0.75Kg 50W 1.1Kg / 50W PIR 1.24Kg / 100W 1.3Kg / 200W 2.6Kg

* All BELL Lighting luminaires are rated L80 B10, so for a 50,000 hour product. L80B10 at 50,000 hours our fittings will still have 80% of initial lumen, only 10% of fittings may fail to achieve this

Code	V	W	Description	Lm	Temp	Lm/W	Hours
10700	240	10	10W Skyline Vista LED Floodlight	800	4000K	80	25000
10701	240	10	10W Skyline Vista LED PIR Floodlight	800	4000K	80	25000
10702	240	20	20W Skyline Vista LED Floodlight	1600	4000K	80	25000
10703	240	20	20W Skyline Vista LED PIR Floodlight	1600	4000K	80	25000
10704	240	30	30W Skyline Vista LED Floodlight	2400	4000K	80	25000
10705	240	30	30W Skyline Vista LED PIR Floodlight	2400	4000K	80	25000
10706	240	50	50W Skyline Vista LED Floodlight	4000	4000K	80	25000
10707	240	50	50W Skyline Vista LED PIR Floodlight	4000	4000K	80	25000
10716	240	100	100W Skyline Vista LED Floodlight	10000	4000K	100	25000
10717	240	200	200W Skyline Vista LED Floodlight	20000	4000K	100	25000
10708	240	10	10W Skyline Vista LED Floodlight	800	2700K	80	25000
10709	240	10	10W Skyline Vista LED PIR Floodlight	800	2700K	80	25000
10710	240	20	20W Skyline Vista LED Floodlight	1600	2700K	80	25000
10711	240	20	20W Skyline Vista LED PIR Floodlight	1600	2700K	80	25000
10712	240	30	30W Skyline Vista LED Floodlight	2400	2700K	80	25000
10713	240	30	30W Skyline Vista LED PIR Floodlight	2400	2700K	80	25000
10714	240	50	50W Skyline Vista LED Floodlight	4000	2700K	80	25000
10715	240	50	50W Skyline Vista LED PIR Floodlight	4000	2700K	80	25000

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio

² Exceeds EU standard of RA 70 for Colour Rendering Index

³ Subject to terms & conditions (Contact Customer Service)

