




Skyline Vigor

LED Polycarbonate Marine Grade Floodlight

The Skyline Vigor LED Floodlight is a genuine all-rounder. Its polycarbonate construction enables this floodlight to be used in the harshest environments. Ideal for coastal locations and available in both 20W & 30W, with and without PIR.

- Genuine replacement for Halogen Floodlight
- Super slim compact design
- Suitable for coastal areas
- Polycarbonate construction
- Separately tested IP65 PIR Sensor (PIR versions)
- PIR Over-ride function (PIR versions)
- Average 8M detection range for PIR Floods
- Available in 4000K Cool White

20W \equiv $\frac{160}{W}$ Energy Saving 88% 30W \equiv $\frac{240}{W}$ Energy Saving 88%

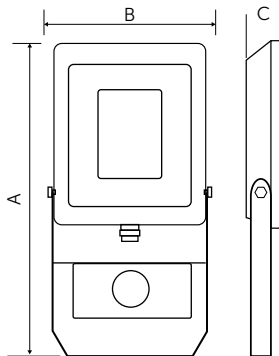


Without PIR

	20W	30W
A	281mm	281mm
B	204mm	204mm
C	37mm	37mm

With PIR

	20W	30W
A	305mm	305mm
B	206mm	206mm
C	40mm	40mm



technical@bellighting.co.uk
sales@bellighting.co.uk

Skyline Vigor

LED Polycarbonate Marine Grade Floodlight

Technical Specification	
Construction	Polycarbonate body, Stainless Steel screws and fixings + toughened glass lens
Driver	BELL
LED Chip	SMD
IP Rating	IP65
Operating Temp	-20°C to +25°C Outdoor use only
Input Voltage	240V
Power Factor	> 0.9
CRI	80 - Exceeds EU standard of Ra 70 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
Windage	20W Non PIR 0.057M ² / 30W Non PIR 0.057M ² / 20W PIR 0.057M ² / 30W PIR 0.057M ²
Weight	20W Non PIR 0.9Kg / 30W Non PIR 0.9Kg / 20W PIR 1.1Kg / 30W PIR 1.1Kg

* All BELL Lighting luminaires are rated L80 B10, so for a 50,000 hour product. L80B10 at 50,000 hours our fittings will still have 80% of initial lumen, only 10% of fittings may fail to achieve this

Code	V	W	Description	Lm	Temp	Lm/W	Hours
10720	240	20	20W Skyline Vigor LED Floodlight	1700	4000K	85	25000
10721	240	30	30W Skyline Vigor LED Floodlight	2500	4000K	83	25000
10722	240	20	20W Skyline Vigor LED PIR Floodlight	1700	4000K	85	25000
10723	240	30	30W Skyline Vigor LED PIR Floodlight	2500	4000K	83	25000

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio

² Exceeds EU standard of RA 70 for Colour Rendering Index

³ Subject to terms & conditions (Contact Customer Service)

