




Stradavoga

LED Street Light

- Ideal for car parks and pedestrian walkways to ensure safe passage of visitors and staff
- Cool white
- Reduced light pollution
- Precision lens system directs light only where it is needed, reducing overspill
- Long life 50000 hours
- Aerodynamic design for reduced windage
- 60mm Post-Top entry

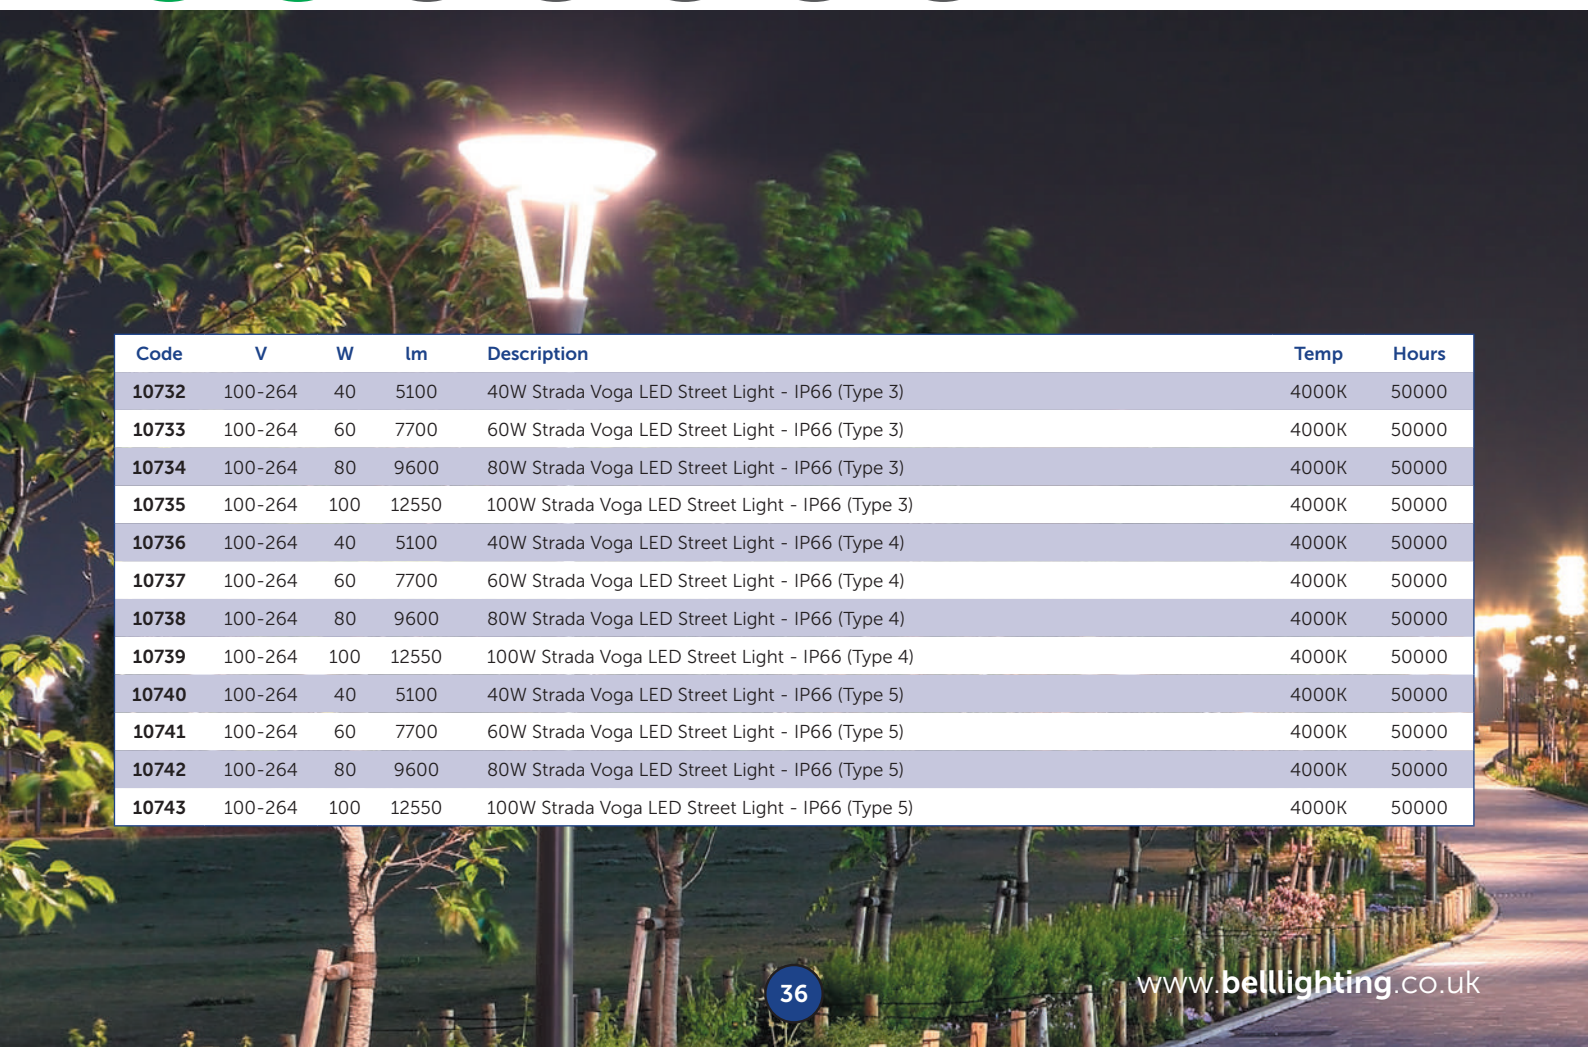

Code	V	W	lm	Description	Temp	Hours
10732	100-264	40	5100	40W Strada Voga LED Street Light - IP66 (Type 3)	4000K	50000
10733	100-264	60	7700	60W Strada Voga LED Street Light - IP66 (Type 3)	4000K	50000
10734	100-264	80	9600	80W Strada Voga LED Street Light - IP66 (Type 3)	4000K	50000
10735	100-264	100	12550	100W Strada Voga LED Street Light - IP66 (Type 3)	4000K	50000
10736	100-264	40	5100	40W Strada Voga LED Street Light - IP66 (Type 4)	4000K	50000
10737	100-264	60	7700	60W Strada Voga LED Street Light - IP66 (Type 4)	4000K	50000
10738	100-264	80	9600	80W Strada Voga LED Street Light - IP66 (Type 4)	4000K	50000
10739	100-264	100	12550	100W Strada Voga LED Street Light - IP66 (Type 4)	4000K	50000
10740	100-264	40	5100	40W Strada Voga LED Street Light - IP66 (Type 5)	4000K	50000
10741	100-264	60	7700	60W Strada Voga LED Street Light - IP66 (Type 5)	4000K	50000
10742	100-264	80	9600	80W Strada Voga LED Street Light - IP66 (Type 5)	4000K	50000
10743	100-264	100	12550	100W Strada Voga LED Street Light - IP66 (Type 5)	4000K	50000




Stradavoga



Technical Specification

Data	
Construction	Die-cast Aluminium
Driver	Sosan
LED Chip	Philips
IP Rating	IP66
Operating Temp	-30°C to +35°C
Input Voltage	220-240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio

* All BELL Lighting luminaires are rated L80 B10, so for a 50,000 hour product. L80B10 at 50,000 hours our fittings will still have 80% of initial lumen, only 10% of fittings will fail to achieve this.

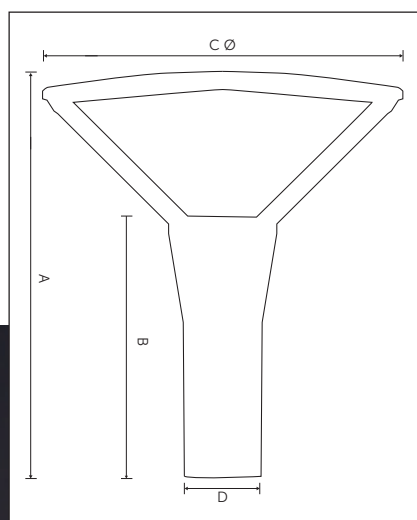

	40W	60W	80W	100W
A	526mm	526mm	526mm	526mm
B	340mm	340mm	340mm	340mm
C Ø	450mm	450mm	450mm	450mm
D	89mm	89mm	89mm	89mm

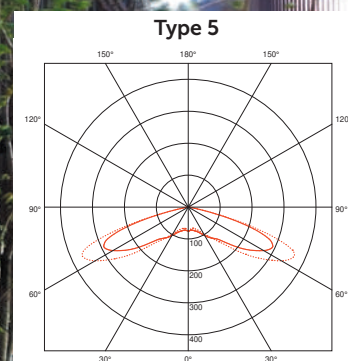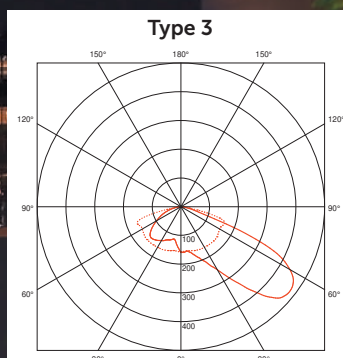

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)