



Strada

LED Street Light

- Ideal for car parks and pedestrian walkways to ensure safe passage of visitors and staff
- Cool white
- Reduced light pollution
- Precision lens system directs light only where it is needed, reducing overspill
- Long life 50000 hours
- Aerodynamic design for reduced windage
- 60mm Side entry



Code	V	W	lm	Description	Temp	Hours
10750	100-264	30	3900	30W Strada LED Street Light - IP66, 4000K	4000K	50000
10751	100-264	50	6500	50W Strada LED Street Light - IP66, 4000K	4000K	50000
10752	100-264	70	9100	70W Strada LED Street Light - IP66, 4000K	4000K	50000






Strada

Technical Specification



Data	
Construction	Die Cast Marine Grade Aluminium
Driver	BELL
LED Chip	Samsung
IP Rating	IP66
Operating Temp	-30°C to +35°C
Input Voltage	220-240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
Windage	30W 0.07M ² / 50W 0.07M ² / 70W 0.095M ²

* All BELL Lighting luminaires are rated L80 B10, so for a 50,000 hour product. L80B10 at 50,000 hours our fittings will still have 80% of initial lumen, only 10% of fittings will fail to achieve this.

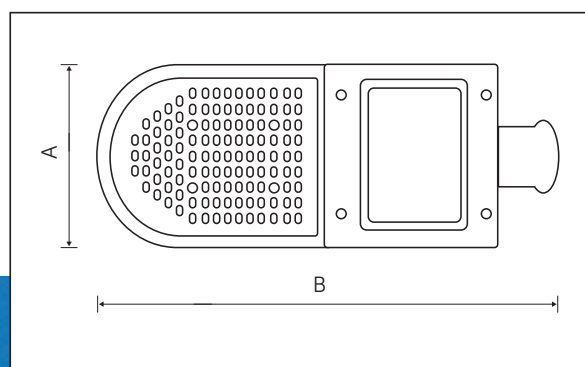

	30W	50W	70W
A	166mm	166mm	202mm
B	478mm	478mm	507mm
Depth	81mm	81mm	88mm

10750 70W

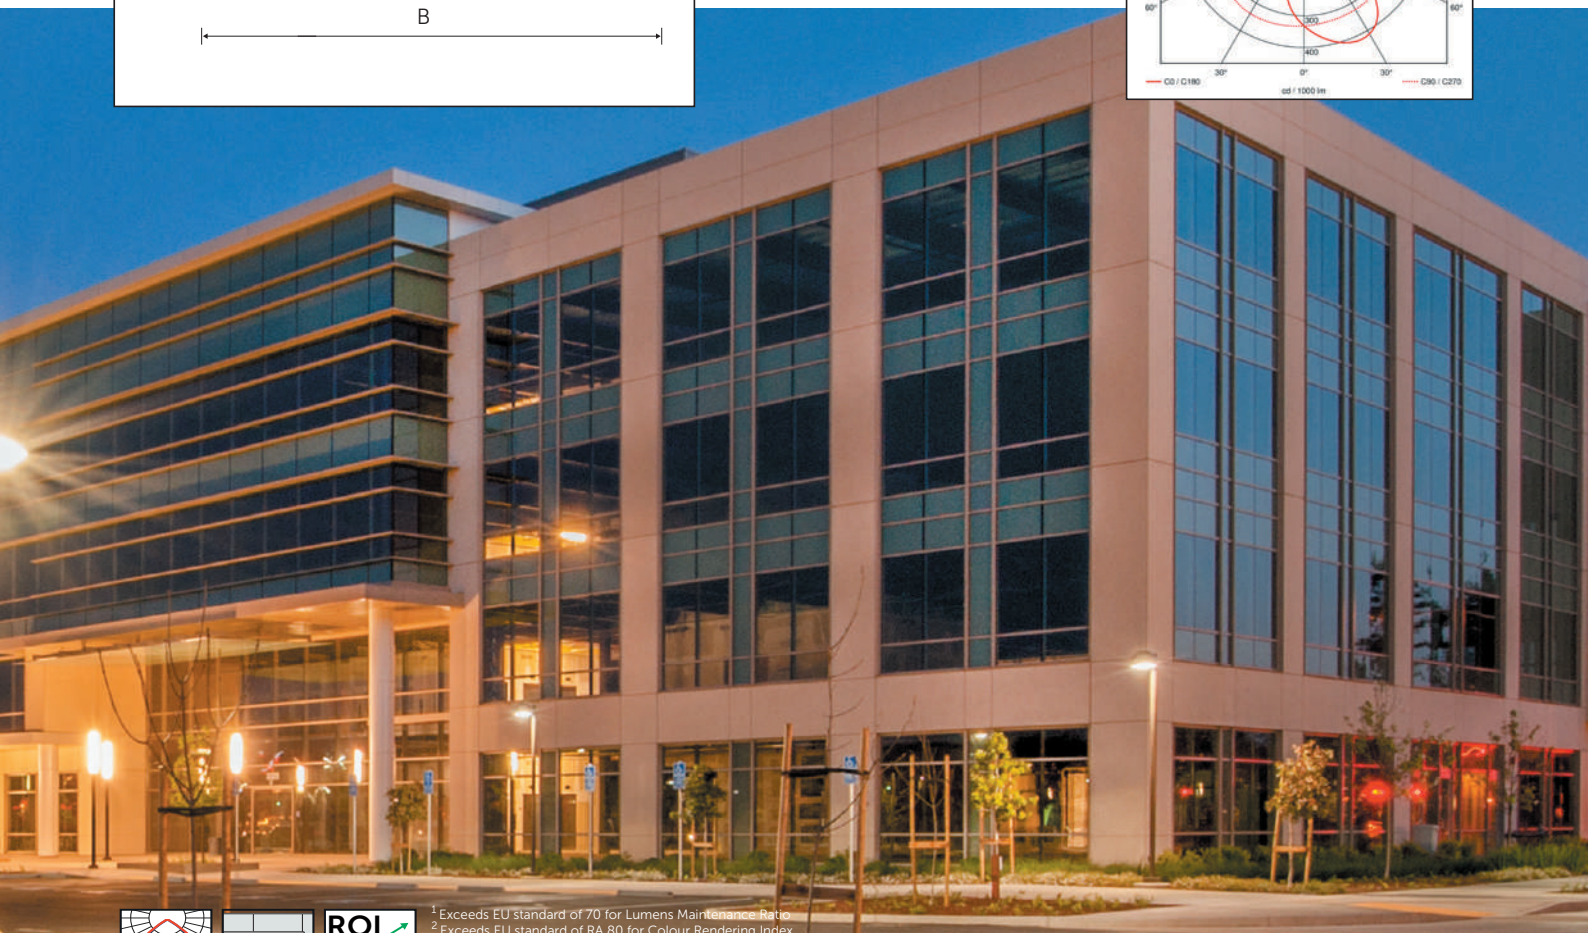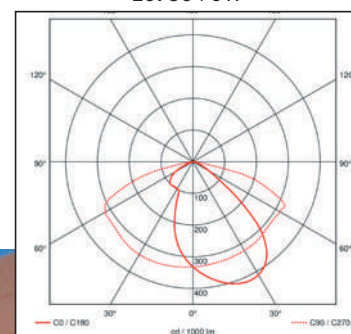

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)